

Strong & Safety



16 X
ABOVE THE
STANDARD

UPPER PUTEK
ABRASION RESISTANCE

2 X
ABOVE THE
STANDARD

UPPER PUTEK
STRENGTH

38 X
ABOVE THE
STANDARD

UPPER PUTEK
WATER VAPOR PERMEABILITY

2 X
ABOVE THE
STANDARD

UPPER NUBUCK
STRENGTH IN TEAR OF CHINK

3 X
ABOVE THE
STANDARD

INNER INSOLE
WATER ABSORPTION

In the **Strong & Safety** category, we offer footwear that is suitable for indoor and outdoor use, for medium-heavy environments, industrial companies, logistics and transport, for various trades, for outdoor operations and warehouses.

We bring part of the collection in this category with unique **MICHELIN® Technical Soles**, **GORE-TEX® membrane**, **FREE-TEX® lining** and also with the unique patented **BOA® Fit System**.



STRONG & SAFETY



MEMBRANE GORE-TEX®
Vapor-permeable,
waterproof GORE-TEX®
membrane




powered by
BOA FIT® SYSTEM
Unique system
of closing footwear

SOLES
BY



MICHELIN® TECHNICAL SOLES
The outsoles are equipped with
a combination
of specially designed rubber
compounds and are inspired
by unique technical design
of world famous brands Michelin®
tires



FREE-TEX® LINING
Vapor-permeable,
water-resistant
membrane



FORCED CIRCULATION
Exhaust ventilation system
combined with lining with
absorbent capability. These
shoes are "breathing" and
provide maximum comfort

**anatomic
DRY SOLE**

ANATOMIC DRY SOLE
Anatomically shaped insole
with excellent absorbency
and dryness



SPACE COMFORT
Optimized ergonomics
and shoe width

NON METALLIC

NON METALLIC
Shoes without any metal
components suitable for area
that require it



HRO
The outsoles resistant to fuel
oils and contact heat HRO
up to 300 °C

PU-TEK

**ABRASION-RESISTANT
PUTEK FABRIC**
High-strength polyamide
fabric PUTEK



OCCUPATIONAL AND SAFETY ANKLE SHOES
 FULL GRAIN LEATHER, GORE-TEX® MEMBRANE,
 POWERED BY BOA® FIT SYSTEM, MICHELIN® TECHNICAL SOLES



OAKLAND

7770

ORDER NO. 7770-06 | 7770-S7L

VERSION 06 06 FO HRO SR - without toe cap and kevlar midsole, hydrophobic, GORE-TEX® membrane, MICHELIN® Technical Soles powered by BOA® Fit System

VERSION S7L S7L FO HRO SR - with composite toe cap and kevlar midsole, hydrophobic, GORE-TEX® membrane, MICHELIN® Technical Soles powered by BOA® Fit System

SIZE 39 - 48

STANDARD 06: EN ISO 20347:2022 | S7L: EN ISO 20345:2022

UPPER smooth cowhide leather in a thickness of 2,0 - 2,2 mm

LINING vapor permeable, waterproof GORE-TEX® membrane

INNER HI-POLY - anatomically shaped, lightweight polyurethane foam coated with fabric MESH, antistatic

SOLE MICHELIN®-PU/RUBBER - up to 300°C, HRO, SR, resistant to fuel oils, slip resistant, antistatic



OCCUPATIONAL AND SAFETY ANKLE SHOES
 FULL GRAIN LEATHER, GORE-TEX® MEMBRANE,
 MICHELIN® TECHNICAL SOLES



HAMILTON

7580

ORDER NO. 7580-06 | 7580-S7L

VERSION 06 06 FO HRO SR - without toe cap and kevlar midsole, hydrophobic, GORE-TEX® membrane, MICHELIN® Technical Soles

VERSION S7L S7L FO HRO SR - with composite toe cap and kevlar midsole, hydrophobic, GORE-TEX® membrane, MICHELIN® Technical Soles

SIZE 39 - 48

STANDARD 06: EN ISO 20347:2022
 S7L: EN ISO 20345:2022

UPPER smooth cowhide leather in a thickness of 2,0 - 2,2 mm

LINING vapor permeable, waterproof GORE-TEX® membrane

INNER HI-POLY - anatomically shaped, lightweight polyurethane foam coated with fabric MESH, antistatic

OUTSOLE MICHELIN®-PU/RUBBER - up to 300°C, HRO, SR, resistant to fuel oils, slip resistant, antistatic





OCCUPATIONAL AND SAFETY BOOTS - FULL GRAIN LEATHER, GORE-TEX® MEMBRANE, MICHELIN® TECHNICAL SOLES



UTAH

7590

ORDER NO.	7590-06 7590-S7L	UPPER	smooth cowhide leather in a thickness of 2,0 - 2,2 mm
VERSION 06	06 FO HRO SR - without toe cap and kevlar midsole, hydrophobic, GORE-TEX® membrane, MICHELIN® Technical Soles	LINING	vapor permeable, waterproof GORE-TEX® membrane
VERSION S7L	S7L FO HRO SR - with composite toe cap and kevlar midsole, hydrophobic, GORE-TEX® membrane, MICHELIN® Technical Soles	INNER INSOLE	HI-POLY - anatomically shaped, lightweight polyurethane foam coated with fabric MESH, antistatic
SIZE	39 - 48	OUTSOLE	MICHELIN®-PU/RUBBER - up to 300°C, HRO, SR, resistant to fuel oils, slip resistant, antistatic
STANDARD	06: EN ISO 20347:2022 S7L: EN ISO 20345:2022		

NEW SR E A NEW WPA WR NEW FO HRO

06

NEW SR E A NEW WPA WR NEW PL WR NEW FO HRO

S7L

SAFETY ANKLE SHOES - FULL GRAIN LEATHER
MICHELIN® TECHNICAL SOLES



LOS ANGELES

6440

ORDER NO.	6440-S3	LINING	laminated breathable fabric MESH
VERSION	S3 HRO SRC - with composite toe cap and kevlar midsole, hydrophobic	INNER INSOLE	HI-POLY - anatomically shaped, lightweight polyurethane foam coated with fabric MESH , antistatic
SIZE	39 - 48	OUTSOLE	MICHELIN®-PU/RUBBER - up to 300°C, HRO, SRC, resistant to fuel oils, slip resistant, antistatic
STANDARD	EN ISO 20345:2011		
UPPER	cowhide leather coated, brushed in a thickness of 1,8 - 2,0 mm		
NOTE	the upper of the shoe must not come into contact with an aggressive acid or base!		



OCCUPATIONAL ANKLE SHOES - FULL GRAIN LEATHER
WATERPROOF FREE-TEX® LINING, MICHELIN® TECHNICAL SOLES



ARKANSAS

6430

ORDER NO.	6430-S3	LINING	thermo-insulating, breathable waterproof FREE-TEX® lining
VERSION	S3 CI WR HRO SRC - with composite toe cap and kevlar midsole, hydrophobic, waterproof FREE-TEX® lining, MICHELIN® Technical Soles	INNER INSOLE	HI-POLY - anatomically shaped, lightweight polyurethane foam coated with fabric MESH , antistatic
SIZE	39 - 48	OUTSOLE	MICHELIN®-PU/RUBBER - up to 300°C, HRO, SRC, resistant to fuel oils, slip resistant, antistatic
STANDARD	EN ISO 20345:2011		
UPPER	cowhide leather NUBUCK in a thickness of 1,9 - 2,1 mm		



SAFETY BOOTS - CHAIN SAW RESISTANT - FULL GRAIN LEATHER
MEMBRANE GORE-TEX®, ANTICUT LEVEL 2



CURYCH


7990

ORDER NO. 7990-S7L
VERSION S7L FO CI SR ANTICUT LEVEL 2 - with composite toe cap and kevlar midsole, hydrophobic, anticut kevlar lining, kevlar sewing, membrane GORE-TEX®
SIZE 39 - 48
STANDARD EN ISO 20345:2022 | EN ISO 17249
UPPER brushed cow suede leather VELOUR in a thickness of 2,0 - 2,2 mm

LINING vapor permeable, waterproof GORE-TEX® membrane
INNER INSOLE HI-POLY - anatomically shaped, lightweight polyurethane foam coated with fabric MESH, antistatic
OUTSOLE RUBBER - resistant to fuel oils, glued construction, antistatic, slip resistant



STRONG & SAFETY

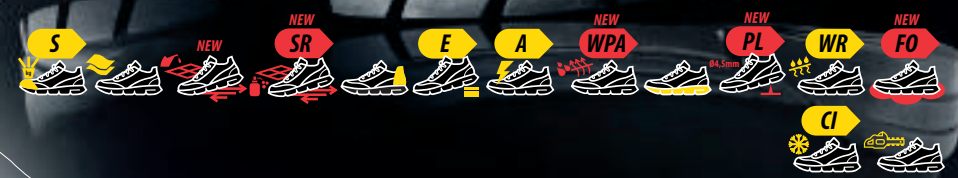

ANKLE SAFETY SHOES - FULL GRAIN LEATHER
DESIGNED FOR ASPHALT PAVERS



HAMBURG

5290

ORDER NO. 5290-S2PL
VERSION S2 PL FO HI SC HRO - with composite toe cap and midsole
SIZE 39 - 48
STANDARD EN ISO 20345:2022
UPPER cow leather with pattern in a thickness of 1,6 - 1,8 mm

LINING laminated breathable fabric MESH
INNER INSOLE HI-POLY - anatomically shaped, lightweight polyurethane foam coated with fabric MESH, antistatic
OUTSOLE EVA/RUBBER - up to 300°C, HRO, resistant to fuel oils, slip resistant, antistatic, double density injection



SAFETY ANKLE SHOES ESD - FULL GRAIN LEATHER
WATERPROOF FREE-TEX® LINING



DORTMUND

2540

ORDER NO.	2540-S7LES	LINING	thermo-insulating, breathable waterproof FREE-TEX® lining
VERSION	S7L FO ESD HRO SR - with composite toe cap and kevlar midsole, hydrophobic, waterproof FREE-TEX® lining - antistatic properties ESD	INNER INSOLE	HI-POLY - anatomically shaped, lightweight polyurethane foam coated with fabric MESH, antistatic
SIZE	39 - 48	OUTSOLE	PU/RUBBER - up to 300°C, resistant to fuel oils, antislip, antistatic, double density injection
STANDARD	EN ISO 20345:2022		
UPPER	cowhide leather PULL-UP in a thickness of 2,0 - 2,2 mm		



OCCUPATIONAL ANKLE SHOES ESD - FULL GRAIN LEATHER
WATERPROOF FREE-TEX® LINING



STUTTGART

2550

ORDER NO.	2550-06ESD	LINING	thermo-insulating, breathable waterproof FREE-TEX® lining
VERSION	06 FO ESD HRO SR - without toe cap and midsole, hydrophobic, waterproof FREE-TEX® lining - antistatic properties ESD	INNER INSOLE	HI-POLY - anatomically shaped, lightweight polyurethane foam coated with fabric MESH, antistatic
SIZE	39 - 48	OUTSOLE	PU/RUBBER - up to 300°C, HRO, SR resistant to fuel oils, slip resistant, antistatic, double density injection
STANDARD	EN ISO 20347:2022		
UPPER	cowhide leather PULL-UP in a thickness of 2,0 - 2,1 mm		



SAFETY ANKLE SHOES - FULL GRAIN LEATHER



MASKAT

5440

ORDER NO.	5440-S1P	LINING	laminated breathable fabric MESH
VERSION	S1 P HRO SRC - with composite toe cap and kevlar midsole	INNER INSOLE	HI-POLY - anatomically shaped, lightweight polyurethane foam coated with fabric MESH , antistatic
SIZE	36 - 48	OUTSOLE	PU/RUBBER - up to 300°C, HRO, SRC, resistant to fuel oils, antistatic, slip resistant, double density injection
STANDARD	EN ISO 20345:2011		
UPPER	brushed cow suede leather, coated in a thickness of 1,8 - 2,0 mm		
NOTE	the upper of the shoe must not come into contact with an aggressive acid or base!		




SPACE comfort



anatomic DRY SOLE



NEW 02



OCCUPATIONAL AND SAFETY BOOTS
FULL GRAIN LEATHER, WINTER DESIGN



EDINBURGH

5180

ORDER NO.	5180-02 5180-S3	UPPER	cowhide leather CRAZY HORSE in a thickness of 1,9 - 2,1 mm
VERSION 02	02 FO CI SRC - without toe cap and midsole, hydrophobic, winter design	LINING	hair plush DELTA
VERSION S3	S3 CI SRC - with composite toe cap and kevlar midsole, hydrophobic, winter design	INNER INSOLE	anatomically shaped, coated with hair plush DELTA , antistatic
SIZE	39 - 48	OUTSOLE	PU/PU - resistant to fuel oils, slip resistant, antistatic, double density injection
STANDARD	02: EN ISO 20347:2022 S3: EN ISO 20345:2011		



SPACE comfort



anatomic DRY SOLE



STRONG & SAFETY

SAFETY LOW SHOES - FULL GRAIN LEATHER



BRAGA

2685

ORDER NO.	2685-S3L	LINING	laminated breathable fabric MESH
VERSION	S3L FO HRO SR - with composite toe cap and kevlar midsole, hydrophobic	INNER INSOLE	HI-POLY - anatomically shaped, lightweight polyurethane foam coated with fabric MESH , antistatic
SIZE	39 - 48	OUTSOLE	PU/RUBBER - up to 300°C, HRO, SR, resistant to fuel oils, antistatic, slip resistant, double density injection
STANDARD	EN ISO 20345:2022		
UPPER	brushed cow suede leather VELOUR in a thickness of 1,7 - 1,9 mm		



SAFETY ANKLE SHOES - FULL GRAIN LEATHER



PORTO

2680

ORDER NO.	2680-S3L	LINING	laminated breathable fabric MESH
VERSION	S3L FO HRO SR - with composite toe cap and kevlar midsole, hydrophobic	INNER INSOLE	HI-POLY - anatomically shaped, lightweight polyurethane foam coated with fabric MESH , antistatic
SIZE	39 - 48	OUTSOLE	PU/RUBBER - up to 300°C, HRO, SR, resistant to fuel oils, antistatic, slip resistant, double density injection
STANDARD	EN ISO 20345:2022		
UPPER	brushed cow suede leather VELOUR in a thickness of 1,7 - 1,9 mm		





SAFETY LOW SHOES
FULL GRAIN LEATHER

ASTANA

2765

ORDER NO. 2765-S3

VERSION S3 SRC - with composite toe cap and kevlar midsole, hydrophobic

SIZE 36 - 48

STANDARD EN ISO 20345:2011

UPPER cowhide leather **NUBUCK** in a thickness of 1,8 - 2,0 mm

LINING laminated breathable fabric **MESH**

INNER INSOLE **HI-POLY** - anatomically shaped, lightweight polyurethane foam coated with fabric **MESH**, antistatic

OUTSOLE **PU/PU** - resistant to fuel oils, antistatic, double density injection, slip resistant

NOTE divergence of the material color shades is not a fault



STRONG & SAFETY

SAFETY ANKLE SHOES
FULL GRAIN LEATHER



DAMASK

2760

ORDER NO. 2760-S3

VERSION S3 SRC - with composite toe cap and kevlar midsole, hydrophobic

SIZE 36 - 48

STANDARD EN ISO 20345:2011

UPPER cowhide leather **NUBUCK** in a thickness of 1,8 - 2,0 mm

LINING laminated breathable fabric **MESH**

INNER INSOLE **HI-POLY** - anatomically shaped, lightweight polyurethane foam coated with fabric **MESH**, antistatic

OUTSOLE **PU/PU** - resistant to fuel oils, antistatic, double density injection, slip resistant

NOTE divergence of the material color shades is not a fault



SAFETY LOW SHOES
FULL GRAIN LEATHER, NON METALLIC



MIAMI

5125

ORDER NO. 5125-S3
VERSION S3 SRC - with composite toe cap and kevlar midsole, hydrophobic, **NON METALLIC**
SIZE 36 - 48
STANDARD EN ISO 20345:2011
UPPER cowhide leather **NUBUCK** in a thickness of 1,8 - 2,0 mm

LINING laminated breathable fabric **MESH**
INNER INSOLE anatomically shaped from material **EVA** with a high absorbency, antistatic
OUTSOLE **PU/TPU - transparent** - resistant to fuel oils, antistatic, double density injection, slip resistant



SPACE comfort



anatomic DRY SOLE NON METALLIC



SAFETY ANKLE SHOES
FULL GRAIN LEATHER, NON METALLIC



OXFORD

5130

ORDER NO. 5130-S3
VERSION S3 SRC - with composite toe cap and kevlar midsole, hydrophobic, **NON METALLIC**
SIZE 36 - 48
STANDARD EN ISO 20345:2011
UPPER cowhide leather **NUBUCK** in a thickness of 1,8 - 2,0 mm

LINING laminated breathable fabric **MESH**
INNER INSOLE anatomically shaped from material **EVA** with a high absorbency, antistatic
OUTSOLE **PU/TPU - transparent** - resistant to fuel oils, antistatic, double density injection, slip resistant



SPACE comfort



anatomic DRY SOLE NON METALLIC



SAFETY SANDALS
FULL GRAIN LEATHER, NON METALLIC



KANSAS

5105

ORDER NO. 5105-S1PS
VERSION S1 PS FO SR - with composite toe cap and kevlar midsole, **NON METALLIC**
SIZE 36 - 48
STANDARD EN ISO 20345:2022
UPPER cow suede leather coated, brushed in a thickness of 1,8 - 2,0 mm
NOTE the upper of the shoe must not come into contact with an aggressive acid or base!

LINING laminated breathable fabric **MESH**
INNER INSOLE anatomically shaped from material **EVA** with a high absorbency, antistatic

OUTSOLE **PU/PU** - resistant to fuel oils, antistatic, double density injection, slip resistant



STRONG & SAFETY



SAFETY SANDALS
FULL GRAIN LEATHER, NON METALLIC



LINCOLN

5115

ORDER NO. 5115-S1P
VERSION S1 P SRC - with composite toe cap and kevlar midsole, **NON METALLIC**
SIZE 36 - 48
STANDARD EN ISO 20345:2011
UPPER cowhide leather **NUBUCK** in a thickness of 1,8 - 2,0 mm

LINING laminated breathable fabric **MESH**
INNER INSOLE anatomically shaped from material **EVA** with a high absorbency, antistatic

OUTSOLE **PU/TPU - transparent** - resistant to fuel oils, antistatic, double density injection, slip resistant



SAFETY SHOES - POLYAMIDE FABRIC PUTEK



TAMPERE

5625

ORDER NO.	5625-S3	LINING	laminated breathable fabric MESH
VERSION	S3 SRC - with composite toe cap and kevlar midsole, hydrophobic	INNER INSOLE	HI-POLY - anatomically shaped, lightweight polyurethane foam coated with fabric MESH, antistatic
SIZE	36 - 48	OUTSOLE	PU/PU - resistant to fuel oils, slip resistant, antistatic, double density injection
STANDARD	EN ISO 20345:2011		
UPPER	polyamide abrasion resistant fabric PUTEK		



SAFETY SHOES - FULL GRAIN LEATHER



LAUSANNE

5635

ORDER NO.	5635-S1P	LINING	laminated breathable fabric MESH
VERSION	S1 P SRC - with composite toe cap and kevlar midsole	INNER INSOLE	HI-POLY - anatomically shaped, lightweight polyurethane foam coated with fabric MESH, antistatic
SIZE	36 - 48	OUTSOLE	PU/PU - resistant to fuel oils, slip resistant, antistatic, double density injection
STANDARD	EN ISO 20345:2011		
UPPER	brushed cow suede leather VELOUR in a thickness of 1,6 - 1,8 mm		



OCCUPATIONAL ANKLE SHOES
FULL GRAIN LEATHER



SAN MARINO

3170

ORDER NO.	3170-01	LINNING	laminated breathable fabric MESH
VERSION	01 FO SRA - without toe cap	INNER INSOLE	HI-POLY - anatomically shaped, lightweight polyurethane foam coated with fabric MESH , antistatic
SIZE	36 - 48	OUTSOLE	PU/PU - resistant to fuel oils, slip resistant, antistatic, double density injection
STANDARD	EN ISO 20347:2012		
UPPER	brushed cow suede leather VELOUR in a thickness of 1,6 - 1,8 mm		



SPACE comfort



anatomic DRY SOLE



STRONG & SAFETY



OCCUPATIONAL LOW SHOES
FULL GRAIN LEATHER



SOFIE

3175

ORDER NO.	3175-01	LINNING	laminated breathable fabric MESH
VERSION	01 FO SRA - without toe cap	INNER INSOLE	HI-POLY - anatomically shaped, lightweight polyurethane foam coated with fabric MESH , antistatic
SIZE	36 - 48	OUTSOLE	PU/PU - resistant to fuel oils, slip resistant, antistatic, double density injection
STANDARD	EN ISO 20347:2012		
UPPER	brushed cow suede leather VELOUR in a thickness of 1,6 - 1,8 mm		



SPACE comfort



anatomic DRY SOLE



SEATTLE

2575

ORDER NO.	2575-01P	LINING	laminated breathable fabric MESH
VERSION	01 P FO SRA - without toe cap, anti puncture kevlar insole	INNER INSOLE	HI-POLY - padded, anatomically shaped, made of porous polyurethane foam, coated with fabric MESH, antistatic
SIZE	39 - 47	OUTSOLE	PU/PU - resistant to fuel oils, slip resistant, antistatic, double density injection
STANDARD	EN ISO 20347:2012		
UPPER	brushed cow suede leather VELOUR in a thickness of 1,7 - 1,9 mm		



RICHMOND

2585

ORDER NO.	2585-01	LINING	laminated breathable fabric MESH
VERSION	01 FO SRA - without toe cap	INNER INSOLE	HI-POLY - padded, anatomically shaped, made of porous polyurethane foam, coated with fabric MESH, antistatic
SIZE	36 - 47	OUTSOLE	PU/PU - resistant to fuel oils, slip resistant, antistatic, double density injection
STANDARD	EN ISO 20347:2012		
UPPER	brushed cow suede leather VELOUR in a thickness of 1,7 - 1,9 mm		



OCCUPATIONAL AND SAFETY MIDDLE ANKLE SHOES
FULL GRAIN LEATHER



MADISON

2595

ORDER NO. 2595-01 | 2595-S1

VERSION 01 01 FO SRA - without toe cap

VERSION S1 S1 SRA - with steel toe cap

SIZE 01: 36 - 47 | S1: 39 - 47

STANDARD 01: EN ISO 20347:2012
S1: EN ISO 20345:2011

UPPER dry mild cowhide leather **NUBUCK**
in a thickness of 1,8 - 2,0 mm

LINNING laminated breathable fabric **MESH**

INNER **HI-POLY** - padded, anatomically shaped, made of porous polyurethane foam, coated with fabric **MESH**, antistatic

OUTSOLE **PU/PU** - resistant to fuel oils, slip resistant, antistatic, double density injection



STRONG & SAFETY



OCCUPATIONAL LOW SHOES
LEATHER COMBINED WITH TEXTILE



TIRANA

3195

ORDER NO. 3195-01

VERSIO 01 FO SRA - without toe cap

SIZE 36 - 48

STANDARD EN ISO 20347:2012

UPPER brushed cowhide leather **VELOUR**
in a thickness of 1,7 - 1,9 mm

LINNING laminated breathable fabric **MESH**

INNER **HI-POLY** - anatomically shaped, lightweight polyurethane foam coated with fabric **MESH**, antistatic

OUTSOLE **PU/PU - transparent** - resistant to fuel oils, slip resistant, antistatic, double density injection





SAFETY LOW SHOES
LEATHER COMBINED WITH TEXTILE

ROMA

2665

ORDER NO.	2665-S1	LINING	laminated breathable fabric MESH
VERSION	S1 SRC - with steel toe cap	INNER INSOLE	anatomically shaped from material EVA with a high absorbency, antistatic
SIZE	36 - 48	OUTSOLE	PU/PU - transparent - resistant to fuel oils, antistatic, double density injection, antislip
STANDARD	EN ISO 20345:2011		
UPPER	brushed cow suede leather VELOUR in a thickness of 1,7 - 1,9 mm		



SAFETY ANKLE SHOES
LEATHER COMBINED WITH TEXTILE



LISABON

2660

ORDER NO.	2660-S1	LINING	laminated breathable fabric MESH
VERSION	S1 SRC - with steel toe cap	INNER INSOLE	anatomically shaped from material EVA with a high absorbency, antistatic
SIZE	36 - 48	OUTSOLE	PU/PU - transparent - resistant to fuel oils, antistatic, double density injection, antislip
STANDARD	EN ISO 20345:2011		
UPPER	brushed cow suede leather VELOUR in a thickness of 1,7 - 1,9 mm		





OCCUPATIONAL LOW SHOES
FULL GRAIN LEATHER

VALENCIA

2995

ORDER NO. 2995-01
VERSION 01 FO SRC - without toe cap
SIZE 36 - 48
STANDARD EN ISO 20347:2012
UPPER brushed cow suede leather **VELOUR**
 in a thickness of 1,7 - 1,9 mm

LINING laminated breathable fabric **MESH**
INNER INSOLE anatomically shaped from material **EVA** with a high absorbency, antistatic
OUTSOLE **PU/PU - transparent** - resistant to fuel oils, antistatic, double density injection, slip resistant



STRONG & SAFETY



OCCUPATIONAL ANKLE SHOES
FULL GRAIN LEATHER



MADRID

2990

ORDER NO. 2990-01
VERSION 01 FO SRC - without toe cap
SIZE 36 - 48
STANDARD EN ISO 20347:2012
UPPER brushed cow suede leather **VELOUR**
 in a thickness of 1,7 - 1,9 mm

LINING laminated breathable fabric **MESH**
INNER INSOLE anatomically shaped from material **EVA** with a high absorbency, antistatic
OUTSOLE **PU/PU - transparent** - resistant to fuel oils, antistatic, double density injection, slip resistant



OCCUPATIONAL LOW SHOES
FARMER - FULL GRAIN LEATHER



VALLETTA

2775

ORDER NO.	2775-01	LINNING	CAMBRELLA fabric with absorbency
VERSION	01 FO SRC - without toe cap	INNER INSOLE	anatomically shaped with latex heel pad, coated with CAMBRELLA, antistatic
SIZE	36 - 48	OUTSOLE	PU/PU - resistant to fuel oils, slip resistant, antistatic, double density injection
STANDARD	EN ISO 20347:2012		
UPPER	cowhide leather NUBUCK in a thickness of 1,8 - 2,0 mm		
NOTE	color divergence of the material is not a fault		



OCCUPATIONAL ANKLE SHOES
FARMER - FULL GRAIN LEATHER | WINTER DESIGN



VADUZ

2770

ORDER NO.	2770-01 2770-02W	LINNING 01	CAMBRELLA fabric with absorbency
VERSION 01	01 FO SRC - without toe cap	LINNING 02W	hair plush DELTA
VERSION 02W	02W FO SRC - without steel toe cap, hydrophobic, winter design	INNER INSOLE	anatomically shaped with latex heel pad, coated with CAMBRELLA, antistatic
SIZE	36 - 48	OUTSOLE	PU/PU - resistant to fuel oils, slip resistant, antistatic, double density injection
STANDARD	EN ISO 20347:2012		
UPPER	cowhide leather NUBUCK in a thickness of 1,8 - 2,0 mm		

NOTE color divergence of the material is not a fault



OUTDOOR ANKLE SHOES - FULL GRAIN LEATHER
WATERPROOF FREE-TEX® LINING



WINNIPEG

4900

ORDER NO.	4900-40	LINING	thermo-insulating, breathable waterproof FREE-TEX® lining
VERSION	brown colour, waterproof FREE-TEX® lining	INNER INSOLE	expanded polyurethane of high absorbency, antistatic
SIZE	40 - 47	OUTSOLE	EVA/RUBBER - glued construction
USABILITY	shoes suitable for daily wear and outdoor activities		
UPPER	cowhide leather PULL-UP in a thickness of 1,7 - 1,9 mm		
NOTE	color divergence of the material is not a fault		



STRONG & SAFETY

OCCUPATIONAL ANKLE SHOES
FULL GRAIN LEATHER - WINTER DESIGN



SAN MARINO

3170

ORDER NO.	3170-01W	LINING	hair plush DELTA
VERSION	01W FO SRC - without toe cap, winter design	INNER INSOLE	HI-POLY - anatomically shaped, lightweight polyurethane foam coated with fabric MESH , antistatic
SIZE	36 - 48	OUTSOLE	PU/PU - resistant to fuel oils, slip resistant, antistatic, double density injection
STANDARD	EN ISO 20347:2012		
UPPER	brushed cow suede leather VELOUR in a thickness of 1,6 - 1,8 mm		



OCCUPATIONAL ANKLE SHOES
FULL GRAIN LEATHER - FARMER



DURANGO

2740

ORDER NO.	2740-01	LINING	CAMBRELLA fabric with absorbency
VERSION	01 FO SRC - without toe cap and midsole	INNER INSOLE	anatomically shaped with latex heel pad, coated with CAMBRELLA, antistatic
SIZE	37 - 47	OUTSOLE	PU/PU - resistant to fuel oils, slip resistant, antistatic, double density injection
STANDARD	EN ISO 20347:2012		
UPPER	cowhide leather NUBUCK in a thickness of 1,8 - 2,0 mm		



SPACE comfort



anatomic DRY SOLE



SAFETY SANDALS ESD - FULL GRAIN LEATHER



LYON

2225

ORDER NO.	2225-S1ESD	LINING	laminated breathable fabric MESH
VERSION	S1 ESD SRC - with aluminium toe cap - antistatic properties ESD	INNER INSOLE	HI-POLY - anatomically shaped, lightweight polyurethane foam coated with fabric MESH , antistatic
SIZE	36 - 48	OUTSOLE	PU/PU - resistant to fuel oils, slip resistant, antistatic, double density injection
STANDARD	EN ISO 20345:2011 EN ISO 61340-5-1:2016		
UPPER	cow suede leather, coated, brushed in a thickness of 1,8 - 2,0 mm		



SPACE comfort



anatomic DRY SOLE



SAFETY ANKLE SHOES
FULL GRAIN LEATHER IN A COMBINATION WITH RUBBER



BALTIMORE

4980

ORDER NO. 4980-S3
VERSION S3 SRC - with composite toe cap and kevlar midsole, hydrophobic
SIZE 40 - 47
STANDARD EN ISO 20345:2012
UPPER cowhide leather **CRAZY HORSE** in a thickness of 1,7 - 1,9 mm

LINING laminated breathable fabric **MESH**
INNER INSOLE **HI-POLY** - anatomically shaped lightweight polyurethane foam coated with fabric **MESH**, antistatic
OUTSOLE **EVA/RUBBER** - resistant to fuel oils, antistatic, slip resistant, glued construction, with high rubber occupancy



OCCUPATIONAL BOOTS
FULL GRAIN LEATHER IN A COMBINATION WITH RUBBER



WELLINGTON

4390

ORDER NO. 4390-OB
VERSION OB E SRA - without toe cap
SIZE 38 - 48
STANDARD EN ISO 20347:2012
UPPER brushed cowhide suede leather **VELOUR** in a thickness of 1,7 - 1,9 mm

LINING textile, thermo-insulation **FLEECE**
INNER INSOLE **HI-POLY** - anatomically shaped lightweight polyurethane foam coated with fabric **MESH**, antistatic
OUTSOLE **EVA/RUBBER** - antislip, glued construction, with high rubber occupancy



STRONG & SAFETY