


# CONSTRUCTION SILICONES

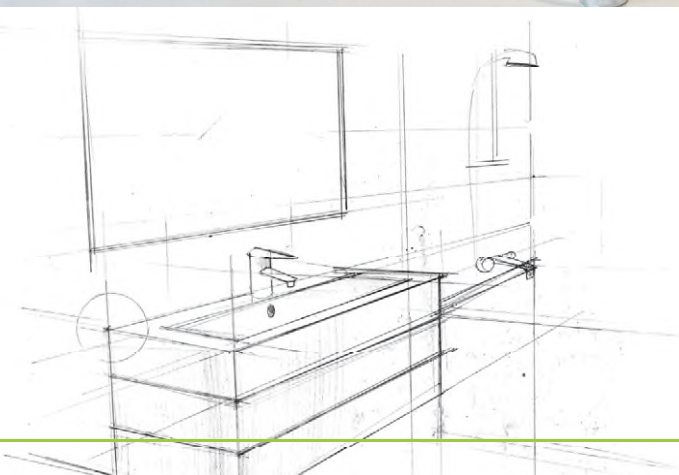

Efficient products for both contractors and individual household users. Excellent for general construction works as well as small household make-overs.

# Universal silicone

## Acetoxy curing system

### APPLICATION

- » Standard glazing of windows, cold frames, partition walls
- » Sealing ducts for electrical cables as well as door and window frames
- » Permanent and flexible connections of typical construction materials with finishing elements

### FEATURES

- » Extremely good adhesion to most construction materials
- » Shrinkproof, humidity-curing
- » Resistant to UV radiation, detergents, oils and greases

Volume	Box	Pallet	Colours
300 ml	15 pcs.	1260 pcs.	transparent, white, brown, grey, black



High  
flexibility

# Sanitary silicone

## Acetoxy curing system

### APPLICATION

- » Used for sealing places exposed to water: edges of baths, wash basins, showers, sinks, shower cubicles, kitchen countertops and plumbing
- » Sealing places exposed to sea water: swimming pools, boats, port facilities

### FEATURES

- » For rooms with high humidity
- » Resistant to long-term water exposure (including sea water)
- » Mould and mildew-proof
- » Extremely good adhesion to glass, glaze, terracotta, ceramics and laminated materials
- » Resistant to UV radiation, detergents, oils and greases

Volume	Box	Pallet	Colours
300 ml	15 pcs.	1260 pcs.	transparent, white



Protection  
against mould  
and mildew

# Neutral sanitary silicone

## Recommended for acrylic bathtubs Neutral curing system

### APPLICATION

- » Sealing and grouting in toilets, bathrooms, kitchens, laundries, sealing edges of acrylic and PCV baths, shower trays, swimming pools, shower cubicles, sinks, kitchen countertops
- » Sealing areas exposed to sea water and places exposed to moisture in refrigeration systems and ventilation systems

### FEATURES

- » Good adhesion to PCV, plastics, aluminium, concrete
- » Resistant to UV radiation, oils and greases
- » No corrosion of concrete and metal
- » Extremely good adhesion to glass, glaze, terracotta, ceramics, aluminium, and many other surfaces

Volume	Box	Pallet	Colours
300 ml	15 pcs.	1260 pcs.	transparent

Does not tarnish  
acrylic surfaces



# Glass silicone

## Specialty silicone sealant Acetoxy curing system

### APPLICATION

- » Installation of cabinets, cupboards, showcases, glass windows
- » For filling gaps in decorations, water curtains, glass blocks and advertising coffer
- » Sealing cold stores and refrigeration components

### FEATURES

- » Extremely good adhesion to glass, glaze, terracotta, ceramics and laminated materials
- » Resistant to large temperature fluctuations
- » Flexible

Volume	Box	Pallet	Colours
300 ml	15 pcs.	1260 pcs.	transparent, white, brown



Resistant to long-term  
water exposure

# Construction silicone

## Neutral curing system

### APPLICATION

- » Filling expansion joints
- » Connecting sheet elements
- » Wall-window and wall-door connections

### FEATURES

- » Neutral
- » Adheres to most substrates
- » Contains nano-additives increasing the efficiency of cross-linking, improving the mechanical properties of the product.

Volume	Box	Pallet	Colours
300 ml	15 pcs.	1260 pcs.	transparent, white, brown, grey, black



No corrosion  
of concrete  
and metal

# NO 11 Neutral silicone

## Professional silicone sealant

### APPLICATION

- » Professional window glazing
- » Providing other high quality seals for: expansion joints, factory-assembled elements, connections for door and window frames, corners in metal cold stores, containers and reservoirs
- » Sealing for the automotive industry and machine-building industry, connecting elements made from galvanized plate and other metals

### FEATURES

- » Extremely good adhesion to wood, glass, glaze, terracotta, ceramics and laminated materials
- » No corrosion of concrete and metal
- » Durable and flexible joints
- » Resistant to long-term exposure to water and UV radiation

Volume	Box	Pallet	Colours
300 ml	15 pcs.	1260 pcs.	transparent, white



Professional  
glazing

# Professional products

Professional products designed for special purposes. Their formulas are dedicated to surfaces needing special treatment.



## Silicone adhesive for mirrors

**100% solvent-free, colourless adhesive**  
**neutral curing system**

### APPLICATION

- » Adhesion of mirror tiles (glass-on-glass adhesion)
- » Direct installation of decorative mirrors on different surfaces: glaze, glass, plaster, concrete as well as metal, wood or plastic frames
- » Sealing mirror edges
- » Fastening glass parts

### FEATURES

- » No mirror discoloration
- » Extremely good adhesion to most materials and surfaces used in construction: glass, rough and factory-finished wood, glaze, brick, concrete, aerated concrete, cement-based mortar, glass laminates, metals and most inelastic plastics

Volume	Box	Pallet	Colours
300 ml	15 pcs.	1260 pcs.	transparent



No. 1  
in Poland

No mirror  
discoloration

# Silicone adhesive for eco-friendly mirrors

**100% solvent-free, clear adhesive**  
**Neutral curing system**

## APPLICATION

- » Perfect for mirror mosaic projects (internal bonding of mirrors) and for fixing mirrors with water-based coatings directly to various substrates, also when needed to accommodate vibration and stress, for sealing around the mirror edges and fixing glass elements outside buildings.
- » **The LAKMA SILIKON mirror adhesive is suitable only for bonding eco-friendly mirrors and mirrors including water-based glass coating.**

## FEATURES

- » Will not discolour the mirror surface
- » Features excellent adhesion to most materials and substrates encountered in construction: glass, wood, both bare and coated, wall tiles, brickwork, concrete, aerated concrete, cement mortars, polymeric glass, metals and most of hard plastics.

Volume	Box	Pallet	Colours
300 ml	15 pcs.	1260 pcs.	transparent



Sealing of eco-friendly mirrors and mirrors including a water-based glass coating.

# Auto silicone

**Neutral curing system**

## APPLICATION

- » Sealing engine and machine parts, devices exposed to high temperatures e.g.: assembly of gearboxes, engines and drive axles
- » Replaces traditional rubber, asbestos, felt, cork and paper seals
- » May be used to seal oil pans, valve covers, seal thermostats, water pumps, rear axle covers, etc.

## FEATURES

- » An alternative to traditional seals
- » Resistant to oils, greases, gasoline and high temperature (up to 350°C)
- » Extremely good adhesion to metal, alloys and some plastics

Volume	Box	Pallet	Colours
300 ml	15 pcs.	1260 pcs.	oxide red



Resistant to oils, lubricants and temperatures up to 350°C

# NLM silicone for marble and natural stone

## Cutting-edge sealant for marble and natural stone Neutral curing system and neutral odour

### APPLICATION

- » Used for stone-masonry, repointing, joining and adhering armour stones, marbles and granites
- » Filling grooves in interior and exterior elements of buildings, filling expansion joints in prefabricated concrete panels and filling joints in floor slabs
- » Sealing places exposed to water: in kitchens, bathrooms, pools and other places subject to changeable weather conditions

### FEATURES

- » No discolouration or stains left on the edges of grooves
- » Great adhesion to natural stone (granite, sandstone, marble), brick, clinker brick, concrete, metal, wood and most of other materials used in construction
- » No corrosion of concrete and metal
- » Includes mould and mildew-proof agents
- » High resistance to changeable weather conditions and UV radiation

Volume	Box	Pallet	Colours
300 ml	15 pcs.	1260 pcs.	transparent, black

Ideal for  
sandstone



# KA12 Aquarium silicone

## Fast curing silicone sealant

### APPLICATION

- » Adhesion of glass-to-glass in traditional aquariums and terrariums
- » Adhesion and sealing of glass-on-glass, metal, ceramics and stainless steel elements
- » Glazing windows, showcases and cold frames, both on an industrial and a small scale

### FEATURES

- » Safe for animals and plants
- » Durable joints with high mechanical performance
- » Extremely good adhesion to glass, ceramics, stainless or coated steel
- » High resistance to changeable weather conditions and UV radiation

Volume	Box	Pallet	Colours
300 ml	15 pcs.	1260 pcs.	transparent, black



# High-temperature silicone

## Acetoxy curing system

### APPLICATION

- » Sealing and adhering in places exposed to high temperatures (up to 250°C and periodically up to 350°C), such as: furnaces, chimneys, heating devices, ventilation systems, air-conditioning, combustion systems, flues
- » The product is recommended for furnace doors in fireplaces and industrial furnaces

### FEATURES

- » Joints resistant to high temperatures, oils, lubricants, acids, long-term exposure to water (including sea water)
- » Extremely good adhesion to glass or glazed surfaces

Volume	Box	Pallet	Colours
300 ml	15 pcs.	1260 pcs.	oxide red

Resistant to  
temperatures  
up to 350°C



# Fireplace sealant

## Sodium silicate-based sealing compound

### APPLICATION

- » Filling cracks, chinks and defects in flues or ducts
- » Repairing construction and technical elements exposed to fire
- » Sealing chimneys, stoves, grates

### FEATURES

- » Resistant (after curing) to temperatures up to 1200°C
- » High gas tightness
- » The joint does not shrink or expand after hardening

Volume	Box	Pallet	Colours
300 ml	15 pcs.	1260 pcs.	black

Resistant to  
temperatures  
up to 1200°C





# Roof sealants



Innovative sealants for professional building and construction contractors. Mainly used for roof works.

## Bituminous roof sealants

### Bituminous compound

#### APPLICATION

- » Filling and sealing defects in roofing underfelt, drainpipe and gutter fittings, ventilation ducts
- » Adhering layers of underfelt with roof tiling, roof sheets, etc.
- » Joints between elements of foundation, basement walls, roofs, greenhouses, processing and non-emergency fire water tanks
- » Sealing engineering objects buried in the ground, flyovers, bridges, expansion joints and pipeline fittings

#### FEATURES

- » Excellent adhesion to bituminous, concrete and stone surfaces as well as to metal, wood, glass, paint layers and some plastics
- » Extremely good adherence to both dry and moist surfaces
- » Permanently elastic sealing which is water-proof and has great crack resistance, as well

Volume	Box	Pallet	Colours
300 ml	15 pcs.	1260 pcs.	black



Excellent adhesion to underfelt, roof tiling and sheets

# Resin roof sealants

## Permanently elastic sealing compound

### APPLICATION

- » Sealing roof works, terraces, chimneys and hatches, penetration of roofs or terraces, installation of skylights and roof windows
- » Sealing corrugated and troughed steel sheets as well as ceramic and cement tiles
- » Sealing foundation elements and basement walls; filling expansion joints in roofs and terraces;

### FEATURES

- » The product is water-proof and may be applied under water or during heavy rain which means it can be used for immediate repair works of leaking elements
- » Permanently elastic sealing compound, which enables correcting works and prevents splitting of roof elements
- » Extremely good adhesion to metal, concrete, stone, wood, glass and paint surfaces
- » Low creep enables vertical sealing in temperatures up to 80°C
- » Joints may be painted after hardening and they remain water-proof and resistant to UV radiation

Volume	Box	Pallet	Colours
300 ml	15 pcs.	1260 pcs.	transparent, brown, graphite, red brick



Emergency repairs  
of leaking components

# Rubber roof sealants

## Rubber sealing compound

### APPLICATION

- » Sealing roof works, terraces, chimneys and hatches, penetrations of roofs or terraces
- » Sealing air-conditioning, ventilation and combustion ducts, installation of skylights and roof windows, joints of corrugated and troughed steel sheets as well as asbestos, cement and bituminous tiles
- » Joining foundation elements and basement walls; sealing expansion joints of roofs and terraces

### FEATURES

- » Excellent adhesion to bituminous, concrete and stone surfaces as well as to metal, wood, glass and most plastics
- » May be painted after hardening
- » The joints are resistant to water as well as high and low temperatures
- » Low creep enables vertical sealing

Volume	Box	Pallet	Colours
300 ml	15 pcs.	1260 pcs.	transparent, brown, graphite, red brick



# Acrylics



Durable sealing compounds for pointing, filling and smoothing.

## SILAK AVF 1 sealing acrylic

### Acrylic sealing compound

#### APPLICATION

- » Securing and sealing V-joints in window carpentry
- » Sealing windows, doors, door frames, window frame connections with plaster, window sill
- » Filling joints between tiles, gaps and joints in the walls of houses, walls, plasters and concrete
- » Sealing ventilation, air conditioning and refrigeration installations, containers, trailers and semi-trailers

#### ADVANTAGES

- » For indoor and outdoor use
- » Flexible
- » Paintable



For sealing V-joints in window carpentry

Volume	Box	Pallet	Colours
310 ml	15 pcs.	1260 pcs.	transparent

# Light acrylic filler

## Quick-drying sealing compound

### APPLICATION

- » Shrink-free joint filling (grouting) of drywall immediately before painting
- » Masking bolts and screw heads in installation of suspended ceilings or plasterboards
- » Smoothing cracks or defects in walls and ceilings
- » Creating connections and fixing damages in walls and ceilings of houses, walls, plasters and concrete
- » For interiors

### FEATURES

- » No need to use antiscratch tape
- » Easy application and fast treatment
- » Lint-free sanding
- » Great adhesion to porous surfaces
- » Painting and treatment possible after just 20 minutes

Volume	Box	Pallet	Colours
310 ml	15 pcs.	1260 pcs.	white



Painting possible  
after just 20 minutes

# Silak A universal acrylic sealant

## Dispersion sealing acrylic compound

### APPLICATION

- » Sealing windows, doors, doorframes, joints between window frames and plaster, window sills as well as cracks and joints in house walls, plaster and concrete
- » Filling cracks and scratches on walls and ceilings
- » Sealing ventilation, air conditioning and refrigeration installations, as well as containers, trailers and semi-trailers

### FEATURES

- » Extremely good adhesion to construction materials
- » Easy to paint
- » Resistant to UV radiation
- » Solvent-free
- » Painting possible after 24 hours (at a ca. 2-mm layer)
- » Resistant to cracking

Volume	Box	Pallet	Colours
310 ml	15 pcs.	1260 pcs.	white, brown, grey

Inside and outside



# Foams

The best products for cementing, filling, installing and insulating. The compound is a form of polyurethane foam in a can.



## Gun foam – efficiency of 45 l

### APPLICATION

- » Professional installation of doors and windows
- » Insulating water and sewage systems as well as central heating systems
- » Filling cracks in thermal insulation when insulating structures
- » Soundproofing and sealing construction elements

### FEATURES

- » High mechanical performances and excellent adhesion to typical construction materials such as: brick, concrete, plaster, wood, metals, polystyrene foam, hard PVC and rigid polyurethane foams
- » Excellent thermal insulation and soundproofing features
- » Mildew and mould protection
- » Application also possible in negative temperatures (up to -10°C) – winter version
- » Efficiency up to 45 l depending on temperature and air humidity

Volume	Box	Pallet	Colours
750 ml	12 pcs.	672 pcs.	yellow



Mildew and mould protection

# Low-pressure PVC gun foam – efficiency of 45 l

## APPLICATION

- » Fitting all types of doors and windows
- » Insulating water and sewage systems as well as central heating systems
- » Bonding and insulating wall panels, corrugated steel sheets, roof tiles, etc.
- » Sound-proofing and sealing partition walls and car interiors
- » Joining factory-assembled wood elements in frame structures
- » Thermal insulation of roofs and flat roofs
- » Filling cracks in thermal insulation when insulating construction
- » Application also possible in negative temperatures (up to -10°C) – winter version

## FEATURES

- » Ideal adhesion to even and porous surfaces in installation of door and windows: PVC, wall, concrete, brick, wood, metal and other materials
- » Low expansion formula eliminates warping of frames and guarantees complete filling of cracks
- » Excellent thermal insulation and soundproofing features
- » Humidity-curing
- » Mildew and mould protection
- » Efficiency up to 45 l depending on temperature and air humidity

Volume	Box	Pallet	Colours
750 ml	12 pcs.	672 pcs.	yellow

**Ideal thermal insulation and soundproofing**



# Gun foam – efficiency of 65 l

## APPLICATION

- » Professional installation of PVC doors and windows
- » Insulating water and sewage systems as well as central heating systems
- » Bonding and insulating wall panels, corrugated steel sheets, roof tiles, etc.
- » Thermal insulation of roofs and flat roofs
- » Filling cracks in thermal insulation when insulating construction; in frame structures
- » Installing stairs, window sills and other fittings

## FEATURES

- » Enhanced efficiency to 65 l
- » Fast treatment – even after 15 minutes (depending on temperature and air humidity)
- » Excellent thermal insulation and soundproofing features
- » Regular structure, high flexibility, water-proof, thermally resistant
- » Excellent adhesion to typical construction materials such as: brick, concrete, plaster, wood, metals, polystyrene foam, hard PVC and rigid polyurethane foams
- » Allows stability and flexibility of fitted elements
- » Mildew and mould protection
- » Application also possible in negative temperatures (up to -10°C) – winter version

Volume	Box	Pallet	Colours
830 ml	12 pcs.	672 pcs.	yellow

**Allows stability and flexibility**



## Low expansion PVC hand held foam

### APPLICATION

- » Fitting all types of doors and windows
- » Insulating water and sewage systems as well as central heating systems
- » Cementing and insulating wall panels, corrugated steel sheets, roof tiles, etc.
- » Sound-proofing and sealing partition walls and car interiors
- » Joining factory-assembled wood elements in framed structures
- » Thermal insulation of roofs and flat roofs
- » Filling cracks in thermal insulation when insulating construction

### FEATURES

- » Low expansion formula eliminates warping of frames, and guarantees complete filling of cracks
- » Ideal adhesion to both smooth and porous surfaces present when fitting door and windows: PVC, wall, concrete, brick, wood and metal
- » Excellent thermal insulation and soundproofing features
- » Mildew and mould protection
- » Efficiency up to 45 l depending on temperature and air humidity
- » Application also possible in negative temperatures (up to -10°C) – winter version

Volume	Box	Pallet	Colours
750 ml	12 pcs.	672 pcs.	yellow



Guarantees complete filling of cracks

## Gun foam B1

### APPLICATION

- » Works involving products with Flammability Class B1
- » Fitting window and door frames made of PVC, wood and aluminium
- » Filling and insulating cableways and pipe culverts, central heating systems as well as water and sewage systems
- » Soundproofing and sealing partition walls, car bodies, boats, etc.

### FEATURES

- » Fresh foam has good adherence to all construction materials
- » Cured foam is semi-rigid and mostly is preserved as a closed-cell structure
- » After curing, it is resistant to both low and high temperatures
- » Fire-resistant up to 240 minutes
- » Efficiency up to 45 l depending on temperature and air humidity

Volume	Box	Pallet	Colours
750 ml	12 pcs.	672 pcs.	red



Resistant to both low and high temperatures

# Foam cleaner

An agent used for cleaning surfaces freshly stained with polyurethane compounds

## APPLICATION

- » Removes fresh polyurethane foams and adhesives
- » It is vital for cleaning valves in containers and guns feeding single-composite foam for fitting and sealing
- » Excellent agent for degreasing steel surfaces before application of polyurethanes and silicones
- » Removes lubricants, oils, greases and other similar materials or substances

Volume	Box	Pallet	Colours
500 ml	12 pcs.	576 pcs.	--





# LAKMA SPEC



Sealers for professionals

**10** years  
guarantee  
of producent

## SPEC Chemical Anchor

### Styrene-free polyester resin

#### APPLICATION

- » Used for fastening in various substrates, both solid and hollow
- » Fastening various types of elements, threaded and ribbed rods, screws, hooks and other

#### FEATURES

- » Best resin for empty spaces and concrete
- » Thanks to strong adhesion to the substrate and hardness it creates a highly strong adhesive-shaped connection
- » Elements can be anchored on various depths



Volume	Box	Pallet	Colours
300 ml	6 pcs.	1260 pcs.	—

# SPEC HIGH TACK Assembly glue

## Assembly glue

### APPLICATION

- Gluing all types of building materials: natural stone, wood, concrete, metal, brick, glass, ceramics, plaster, polyurethane, certain plastics, chipboard, etc.
- Connecting elements of galvanized sheet metal, brass and other metals

### FEATURES

- Initial grip on the horizontal surface 500 kg/m<sup>2</sup>, vertical 125 kg/m<sup>2</sup>
- Odourless, does not contain solvents, isocyanates and silicones
- Adheres strongly to all construction surfaces, even wet surfaces
- Insensitive to many chemicals
- After curing, the joint can be repainted (also with water paints)

Volume	Box	Pallet	Colours
300 ml	15 pcs.	1260 pcs.	white, black, transparent

Extra-strong  
initial grip



# SPEC Sanitary Silicone

## A permanent barrier

### APPLICATION

- Sealing in places exposed to water: bathrooms, kitchens, laundries, baths
- Sealing acrylic edges: bathtubs, shower trays, shower cabins, washbasins, sinks, as well as kitchen countertops, etc.
- Sealing in areas exposed to sea water: swimming pools, boats, port facilities

### FEATURES

- Permanent protection of the joint and sealed base against fungus, mould and bacteria
- Adheres strongly to non-porous substrates
- Joint resistant to cleaning and disinfecting agents
- Recommended use in places permanently exposed to water and humidity: bathrooms, kitchens, laundries, saunas, swimming pools

Volume	Box	Pallet	Colours
300 ml	15 pcs.	1260 pcs.	White, transparent

Professional  
sealing



## SPEC Snow-white acrylic

### Modern snow-white acrylic compound

#### APPLICATION

- » Filling gaps and joints in the walls of houses, buildings, plasters and concrete
- » Sealing windows, doors, door frames, window frame connections with plaster, window sill
- » Sealing ventilation, air conditioning and refrigeration installations

#### FEATURES

- » The snow-white tone of acrylic does not cause discolouration after painting over
- » Highly elastic - prevents unsightly cracks in walls
- » Can be used indoors and outdoors
- » Compatible with paints and varnishes available on the market

Highly elastic and resistant to cracks

Volume	Box	Pallet	Colours
300 ml	15 pcs.	1260 pcs.	snow white



## SPEC Strong joint

### Strong innovative hybrid jointing and sealing compound

#### APPLICATION

- » Sealing and joining all types of building materials: natural stone, wood, concrete, metal, brick, glass, mirror, metal, ceramics, plaster, polyurethane, plastics, chipboard etc.
- » Sealing glass elements - ideal joint transparency
- » Grouting roofing elements - can be used on wet substrates
- » Sealing elements exposed to shaking and vibration
- » Grouting elements that need to be repainted
- » Filling expansion joints without the need for an expansion cord

#### FEATURES

- » Modified silicone, which provides more than twice as strong joint durability than silicones
- » No risk of lack of adhesion - all materials and all surfaces
- » Fully paintable
- » Resistant to detergents, acids and solvents
- » Can be used even on damp surfaces
- » Does not corrode unprotected metal and concrete
- » Resistant to weather conditions and UV radiation

Volume	Box	Pallet	Colours
300 ml	15 pcs.	1260 pcs.	transparent



2 x stronger than silicone

# SPEC Bricklaying Mortar

## Polyurethane Bricklaying Mortar

### APPLICATION

- » Polyurethane thin-bed bricklaying mortar
- » For use in masonry constructions with 1-3 mm thick joints
- » Range of application includes internal and external walls of cellular concrete, sand-lime, clay masonry units of appropriate precision class.

### FEATURES

- » High yield
- » Can be used at ambient temperatures as low as -5 °C
- » Superior insulating properties - eliminates thermal bridging
- » Inhibits growth of mould and mildew in the joint

Less time to  
complete the job

Volume	Box	Pallet	Colours
750 ml	12 pcs.	672 pcs.	grey



# SPEC LOW EXPANSION Gun Foam

## One-component polyurethane foam PPU-1

### APPLICATION

- » Recommended use in the assembly of PVC joinery, as well as in a wide range of assembly and construction works
- » Thermal insulation of water, sewage and central heating networks
- » Sealing and installation of window sills
- » Thermal insulation of roofs and inverted roofs
- » Filling gaps in thermal insulation when insulating buildings

### FEATURES

- » Modern low expansion formula - does not distort PVC profiles and fills the gaps thoroughly
- » Increased adhesion to PVC and typical building materials
- » Prevents runoff from vertical surfaces
- » Soundproof and heat insulating protection

Volume	Box	Pallet	Colours
750 ml	12 pcs.	786 pcs.	yellow



	SILAK A UNIVERSAL ACRYLIC	LIGHT ACRYLIC FILLER	UNIVERSAL SILICONE	SANITARY SILICONE	GLASS SILICONE	CONSTRUCTION SILICONE	NEUTRAL SILICONE
● - proper use ○ - acceptable use							
Filling expansion joints, concrete construction elements, façade cladding	○					●	
Sealing areas exposed to constant moisture: baths, sinks, showers, sealing ceramic tiles in corner joints and connections with sanitary facilities	○			●			●
Sealing areas exposed to water and sea water: swimming pools, yachts, port facilities				●			●
Sealing gutters, down pipes			○	○		●	○
Sealing window frames, door frames, windowsills	●	○	○		○	●	○
Filling gaps, cracks in concrete, plasters, bricks, gypsum plaster, stone	●	●				●	
Sealings elements of ventilation systems, air-conditioning, refrigeration systems			●			●	●
Glazing of windows made of wood, hard PCV, aluminium			○		●	○	○
Sealing skylights, greenhouses, solar panels			○		○	●	○
Sealing backlit traffic signs, advertising signs made of glass and plastic						○	○
Bonding and sealing aquariums and terrariums, structural glazing							
Sealing joints in roofing materials, chimney flashing						○	○
Sealing areas exposed to high temperatures up to 250 °C (electric stoves, gas stoves, chimneys, furnace connections, chimney flue)							
Filling gaps between exterior walls and floors (terraces), expansion joints in floorings with underfloor heatings						●	
Installing wall tiles and facades tiles			○	○		○	
Joining floor tiles, filling gaps in ceramic and stone floors exposed to abrasion and loading, for painted seals							
Joining wall tiles and facade tiles			●	●		○	○
Fixing and gluing mirrors							
Fixing and gluing eco-friendly mirrors and mirrors including water-based glass coating							
Secondary sealing of insulated glazing							
Sealing of machine elements (e.g. gearbox covers), filling cracks in the car body, making and gluing seals							
Sealing window frames			○		○	●	○
Glazing putty	○					○	
Paintable sealants	●	●					

NOT1 NEUTRAL SILICONE	NEUTRAL SANITARY SILICONE	SILICONE ADHESIVE FOR MIRRORS	SILICONE ADHESIVE FOR ECO-FRIENDLY MIRRORS	NLM SILICONE FOR MARBLE AND NATURAL STONE	KATZ AQUARIUM SILICONE	HIGH-TEMPERATURE SILICONE	AUTO SILICONE	SBS GRAB ADHESIVE	STYROCOL ECO	SILICON FOR INSULATED GLAZING N033	RESIN ROOF SEALANT	RUBBER ROOF SEALANT	BITUMINOUS ROOF SEALANT
○				○						○		○	○
○	●	○		○									
○	●				○								
○	○				○					○	●	○	
●	○						○			○			
○				●				○		○			
●	●					○	○			○	○	○	
●	○									○			
●	○				○					○	○	○	○
○	○	○								○			
		○			●								
○	○					○	○			○	●	●	●
						●	●						
○				○		○				○		○	○
○				○				●		○			
				○								○	
○	○	○		●									
		●		○									
			●										
○		○								●			
●							●			○			
●	○	○											
								○			○	○	



**LAKMA SAT Sp. z o.o.**  
43-400 Cieszyn, ul. Frysztacka 173  
Poland  
[www.lakma.pl](http://www.lakma.pl)

**Sale support office**  
+48 33 85 26 765, +48 33 85 26 777  
e-mail: [bws@lakma.com](mailto:bws@lakma.com)

